

PT18-10 mk2 and PT30-10 mk2 High Voltage DC Cable Test Systems

Main Output

The PT30-10mk2 has terminals for 0-±30kVDC or 0-60kVDC between the outputs.

Each output allows up to 5mA of continuous current or 10mA for 5 minutes.

Easy 'push/pull' connectors for ease of use.

Mains Supply

115/230V±10% 50/60Hz supply input auto selecting, 750VA maximum.

Metering

The PT30-10 mk2 has independent current and voltage metering for both positive and negative output. Real time analogue meters with a mA range divider for added accuracy.

Construction

The PT30-10 mk2 is housed in a robust case consisting of a rigid frames.

Accessories


A DP40 Discharge/earthing probe is provided with the PT30-10 mk2, the DP40 can discharge energy up to 7.2kJ.

Automatic Discharge/Earthing

The unit has an internal fail-safe automatic discharge system allowing an energy discharge up to 2.5kJ.

Authorised Use

Key operated power switch preventing unauthorised operation.

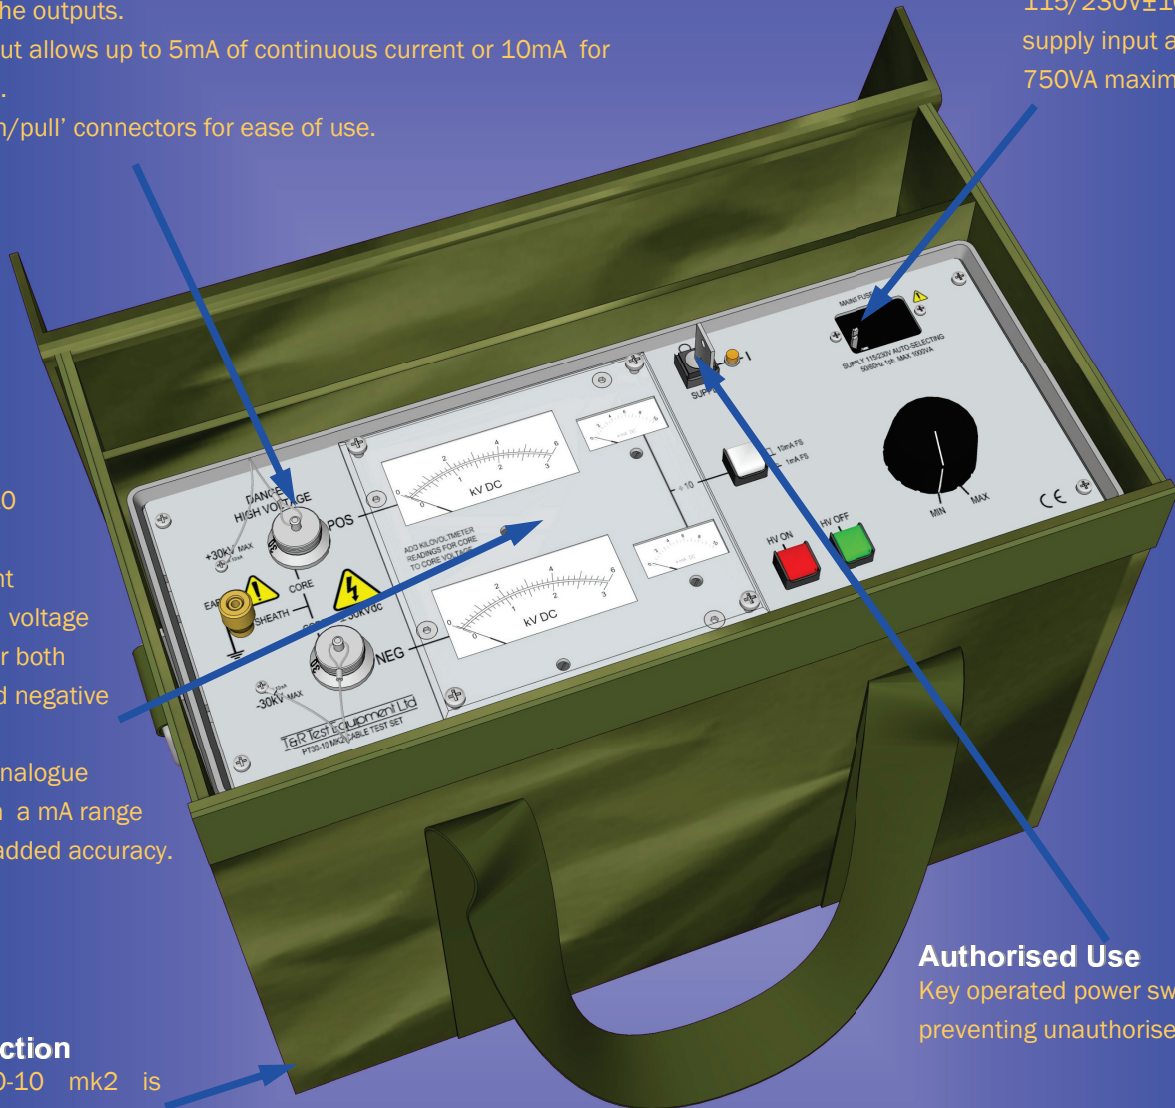

T&R Test Equipment Ltd

Tel: +44 (0)1483 207428

www.trtest.com

Fax: +44 (0)1483 511229